

BUNN®

DUAL TF DBC SST

The TF brewers use Digital Brewer Control with insulated ThermoFresh servers that hold beverages at optimum flavor profile for hours without requiring the energy consumption of traditional warming plates

21.8" x 35.7" x 20.2"

Capacity (Servings/Hour): 265.6
(8 ounces servings)



- Brews 16.3 to 18.9gal (61.7 to 71.5L) of perfect coffee per hour
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- Easy pulse interface allows automatic programming of pulse routine
- Preventive maintenance kit: 39641.0000
- SplashGard® funnel and optional funnel locks help improve safety
- Stores individual coffee recipes so operator can easily brew many varieties
- ThermoFresh® servers are vacuum insulated to keep coffee hot for hours.
- Energy saver mode reduces tank temperature during idle periods
- Operate any combination of BrewWISE equipment error-free with wireless brewer-grinder interface through Smart Funnel with SplashGard®

Related products


- 34447.0000 CARD ASSY,RECIPE TRANSFER(BRW)
- 35600.0022 MHG BLK (60Hz)
- 39000.0002 WATER FILTER, EQHP-25L
- 39000.0005 WATER FILTER, EQHP-25
- 42700.0000 1Gal(3.8L) TF Srvr w/Base, DSG SST
- 42700.0001 1Gal(3.8L) TF Srvr w/Base, DSG BLK
- 42700.0003 1Gal(3.8L) TF Srvr w/Base, DSG SST CD
- 42700.0004 1Gal(3.8L) TF Srvr w/Base, DSG BLK
- 42750.0000 1.5Gal(5.7L) TF Srvr w/Base, DSG SST
- 42750.0001 1.5Gal(5.7L) TF Srvr w/Base, DSG BLK

Product No	Channel	Water Access	Electrical (Voltage)	UPC
34600.0004	College and University Convenience Store Full Service Healthcare Lodging and Hospitality	Plumbed	120/208	72504066257

Coffee Server Type	Coffee Capacity Range	Brewer Type	Finish	Funnel Locks
Satellite Server Thermal Server	Medium	Satellite Systems Thermal Systems	Stainless	No

Brewer to Grinder Interface	Number of Wires (+GND)	Cord Attached	Additional Features	2D Format CAD Available
Wireless	3	No	BUNNLINK Compatible	Yes

Minimum Input Pressure	Maximum Input Pressure	Inlet Water Fitting	BrewWISE	Digital Brewer Control
20 PSI	90 PSI	3/8" Male Flare Fitting	Yes	Yes
Faucet Location	Funnel Type	Machine Depth	Machine Width	Machine Height
Lower	Smart Funnel	20.2 "	21.8 "	35.7 "
Shipping Box Length	Shipping Box Width	Shipping Box Height	Shipping Weight	Volume of shipped box
25.2 "	24.1 "	37.5 "	89.51 lb	13.18 ft3

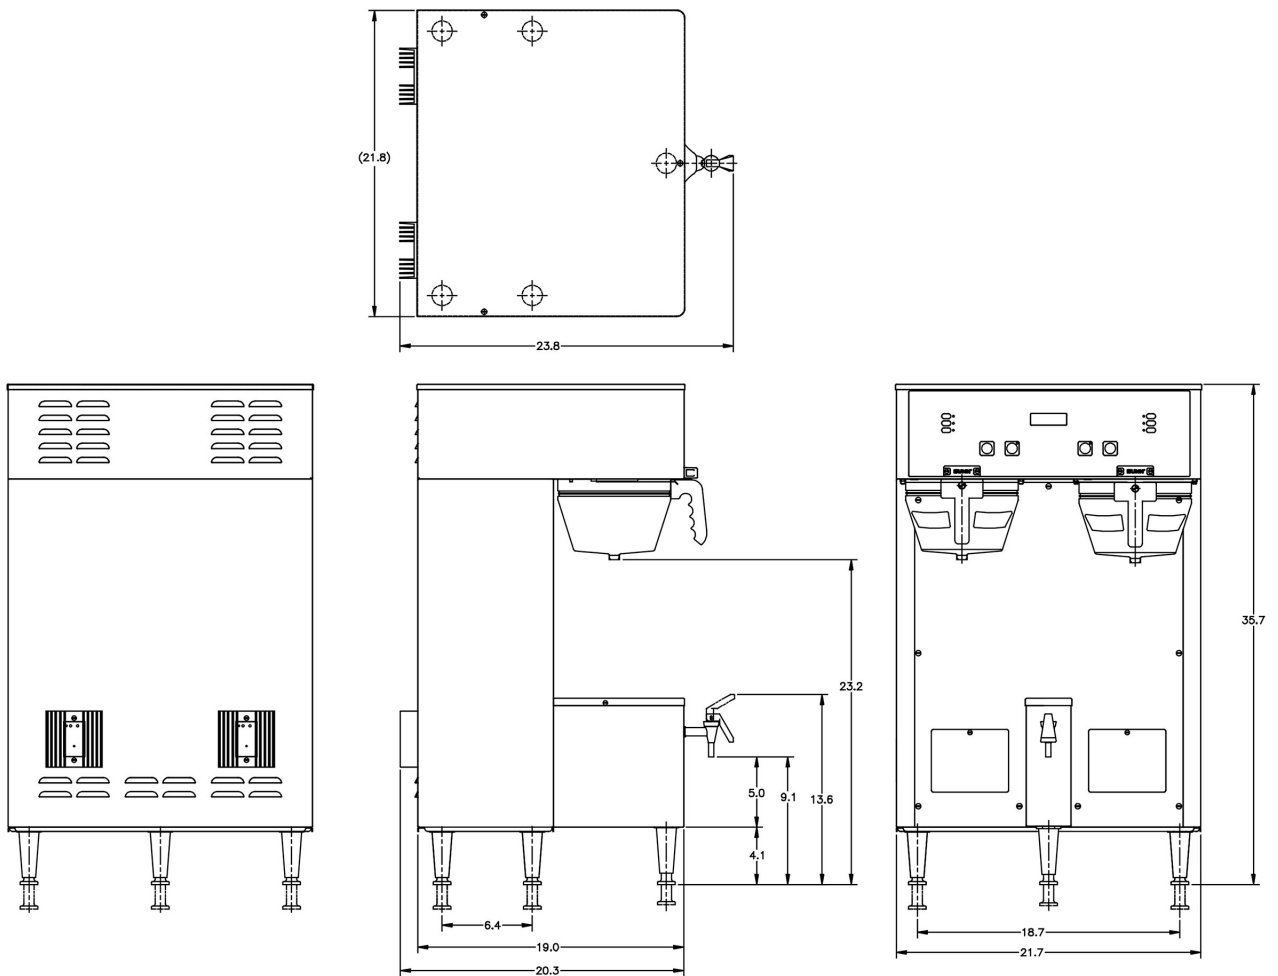

Electric & Capacity

Electrical Configuration Option

Volts-Factory Wired: 120/208

Phase-Factory Wired: 1

Watts-Factory Wired: 5700
Hertz-Factory Wired: 60
Amps-Factory Wired: 27.4
Capacity (Servings/Hour):265.6

To see illustrated parts manuals, visit bunn.com/support/manuals

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com. All dimensions shown in inches.